

TELEX.

TELEX COMMUNICATIONS, INC.

12000 Portland Ave. South, Burnsville, MN 55337

RM-S CAT. NO. 71081-001

19" Single Rack Mount

PN 802334-1

INSTRUCTION SHEET

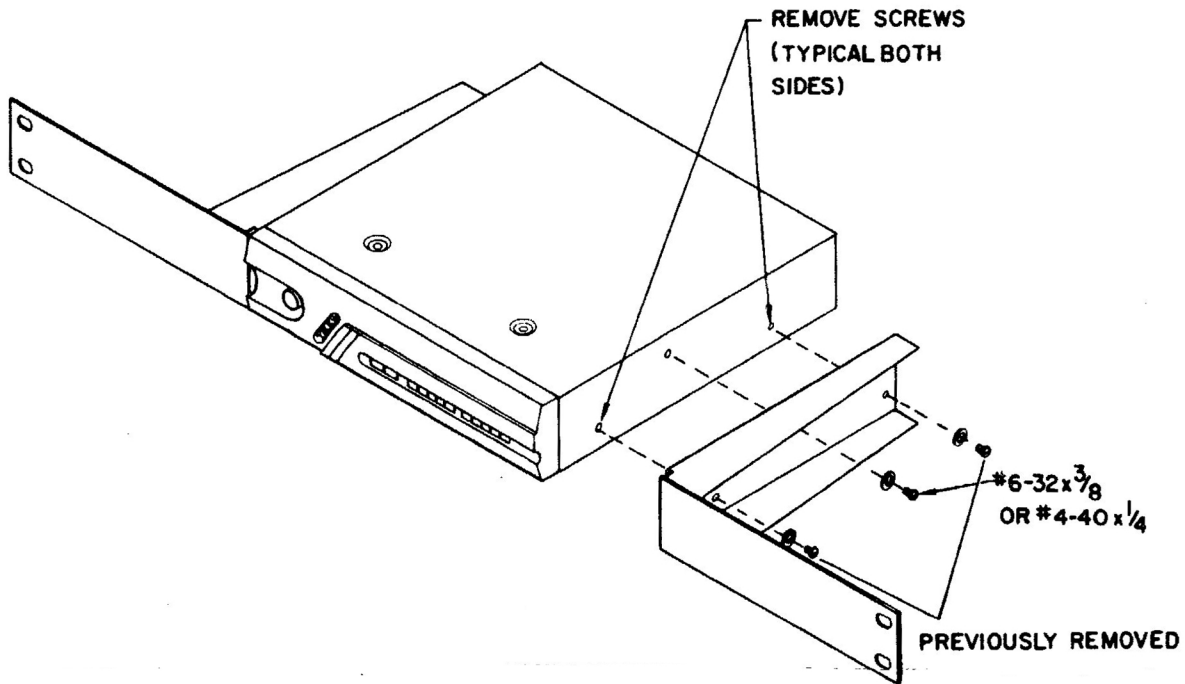


Figure 1

General Description

The RM-S is a single rack mount for Telex wireless products designed to fit in a standard 19 inch rack enclosure.

Installation

To install the unit in the single rack mount, proceed as follows:

- Remove the four Phillips head screws from the sides of the unit. Refer to Figure 1.
- Align the rack mount with the holes on the side of the unit and insert the flatwashers and the previously removed screws. Insert a #6-32 x 3/8" or #4-40 x 1/4" screw and flatwasher (provided with the rack mounts) into the remaining hole. Repeat for other side of the unit. Tighten all screws securely.

- Place the assembly into your 19 inch rack enclosure and insert four (4) #10-32 x 3/8" Phillips pan head screws (supplied) in each corner of the rack mount and secure to your enclosure.

NOTE: When using your receiver in a rack mount enclosure, Telex recommends the use of two 5/8-wave gain antenna and coax assemblies.

When using your transmitter in a rack mount enclosure, Telex recommends the use of a 1/2-wave gain antenna and coax assembly.