
TX-37A

Single-Unit Rack Mount Kit

Installation Instruction Sheet

The TX-37A Rack Mount Kit is designed for mounting one TX-37A transmitter in a standard 19-inch rack (see figure below). It consists of the rack mount kit, rack screws, and washers. To install the kit, follow the instructions below.



Completed rack mount installation

Installation

Step 1: Remove TX-37A Feet

Prepare the TX-37A for installation in the rack mount by removing the rubber feet from the bottom of the transmitter chassis.


Step 2: Remove TX-37A Chassis Screw(s)

Remove the side-panel chassis screws. These screws will be replaced by the screws supplied with the kit when you mount the transmitter to the rack mount kit (Step 3).




Step 3: Secure TX-37A in Rack Mount Kit

Place the TX-37A between the rack mount ears. Use the supplied screws and washers to mount the TX-37A to the kit's rack mount ear brackets (refer to the figures below).



Rack mount ear positioning (front view)

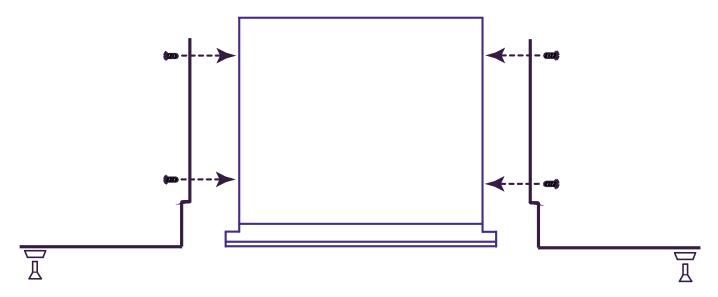

Rack mount ear positioning (top view)

Step 4: Rack Mount Installation

When the TX-37A is mounted in the kit, install the completed assembly in a standard 19-inch rack. This completes the installation.

Gentner

Starin Distributing, Inc 01531 South Calumet Road • Chesterton, IN 46304 USA • (219) 929-4127 • Fax: (219) 929-4377 • www.gentnerals.com © 2002 ClearOne, Inc. All rights reserved.

www.gentnerals.com